


destiny
destinyanddesign.com

BOHEME

by destiny

BOHEME

by destiny


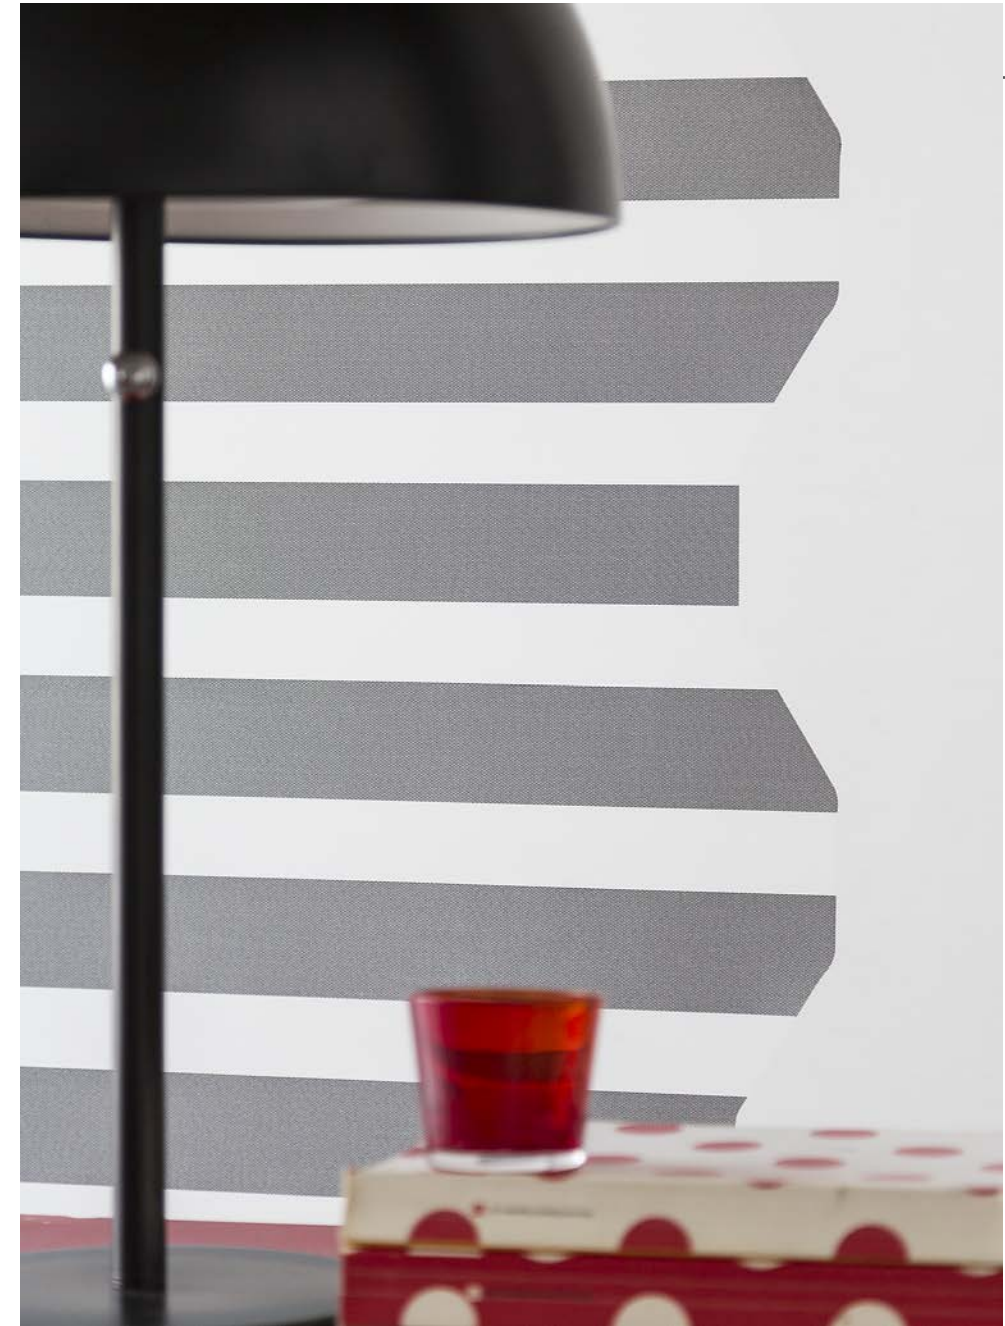


BOHEME concepts

ARONA PANELS

Pág. 4


ARONA CONCEPT

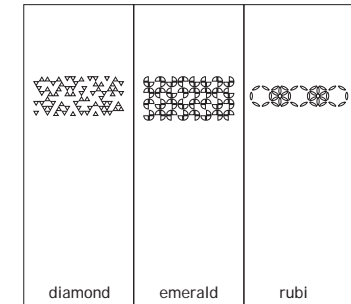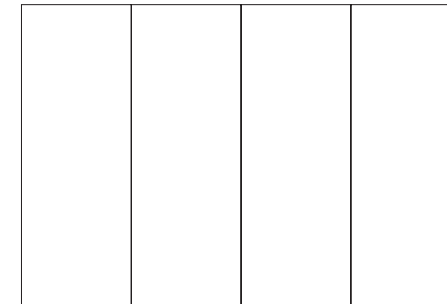


SHAPED PANELS

Pág. 26

VIOLETTA CONCEPT




POMPEI CONCEPT




SECTIONAL PANELS

Pág. 32


TRIESTE CONCEPT




AREZZO CONCEPT




BARI CONCEPT



MILANO CONCEPT




SIENA CONCEPT





ARONA
CONCEPT

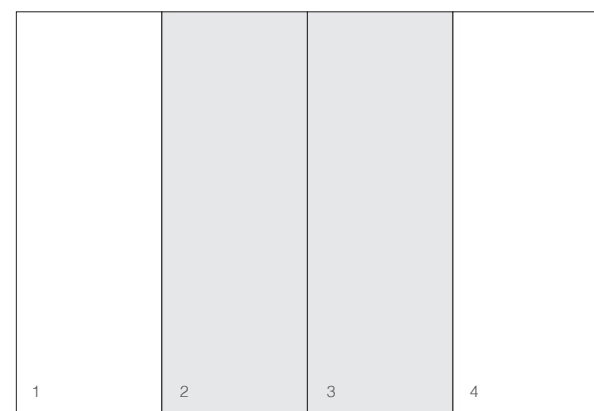


1,4 ALLUSION 1
2,3 CASSAT 1

ARONA
CONCEPT






PARURE 1
URBAN 2



06

ARONA
CONCEPT

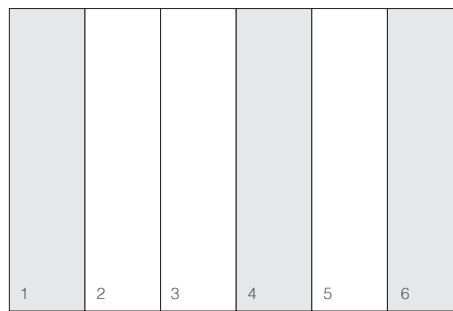



ARONA
CONCEPT

07






ARONA
CONCEPT

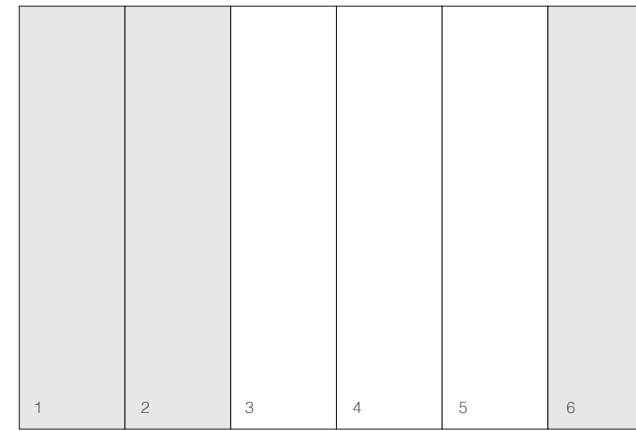


CLUNY 11
BAUDIN 1



ARONA
CONCEPT

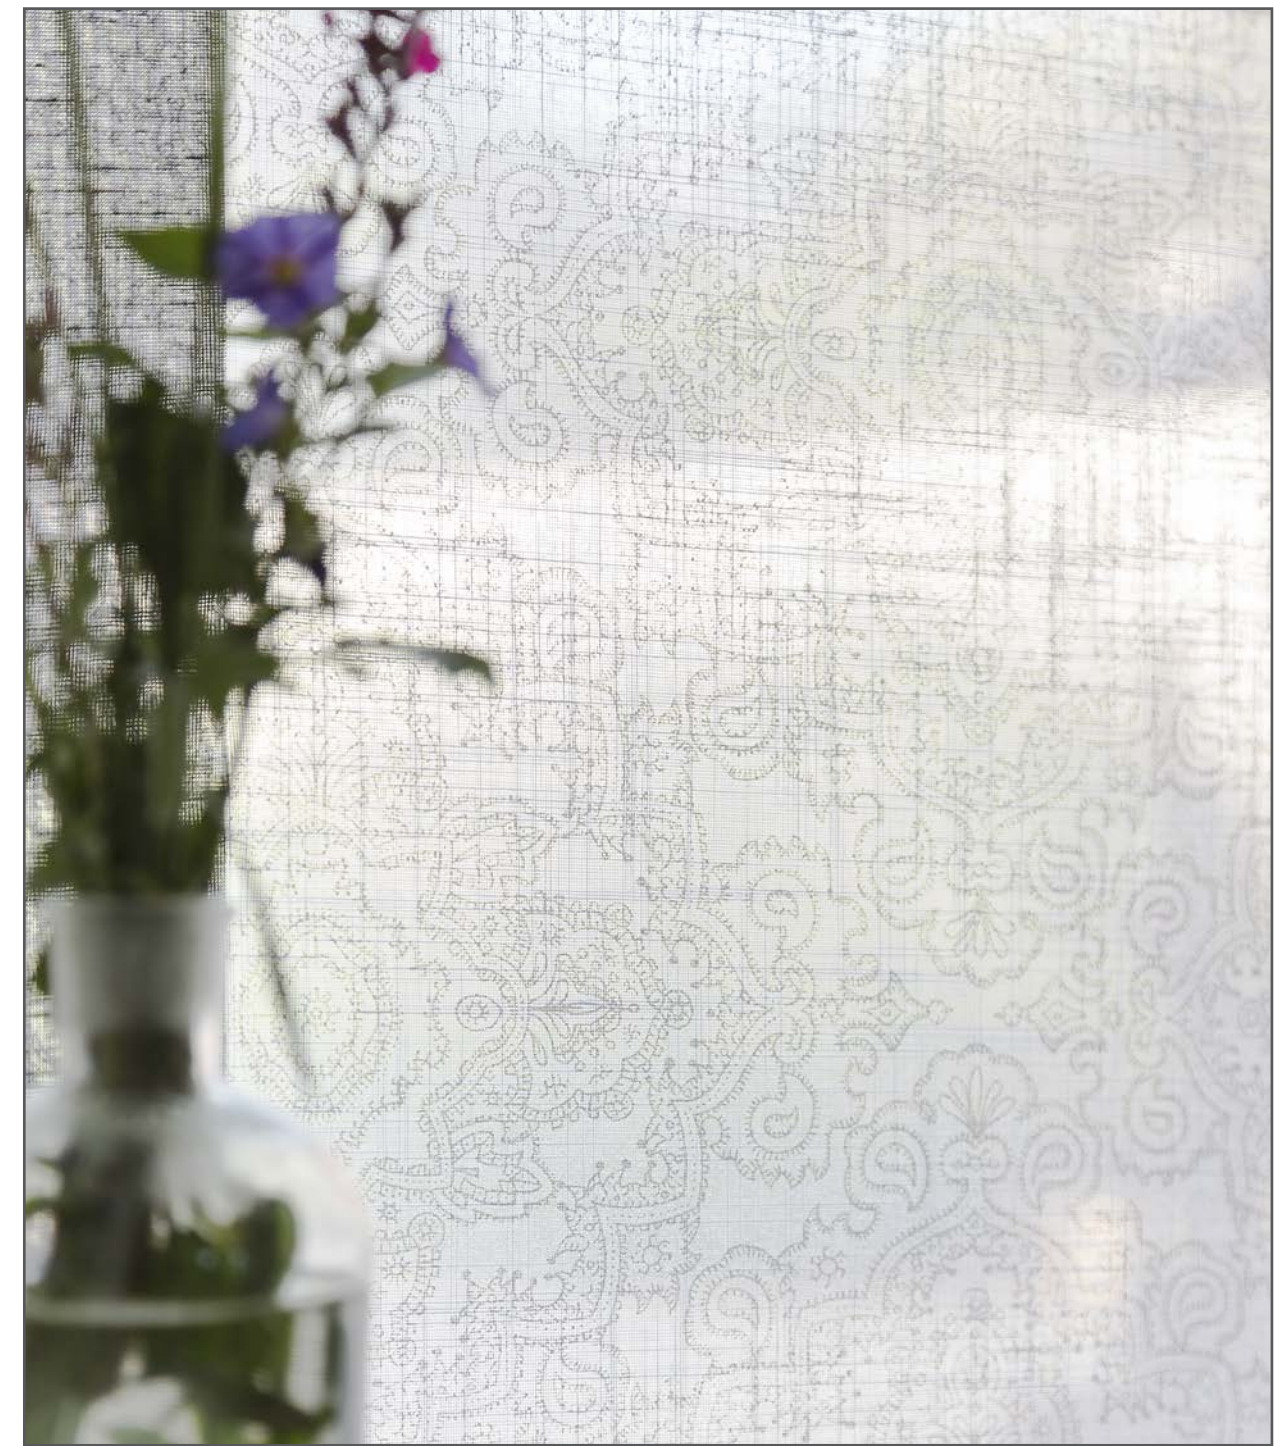



NATURE ECO 240 CARA A




1,4,5,6

NATURE ECO 240 CARA B




2,3



ARONA
CONCEPT




ARONA
CONCEPT

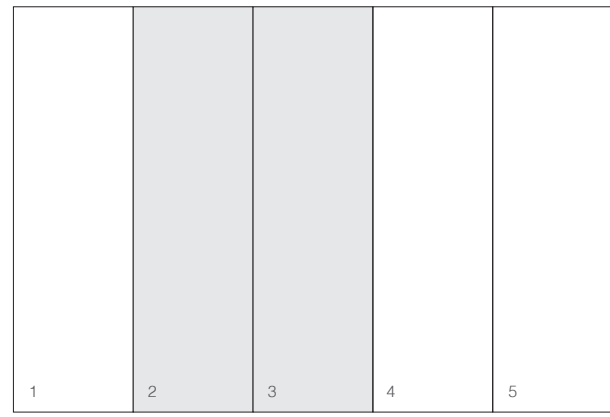

TEXTUR ECO 1
VALENTI 2




ARONA
CONCEPT

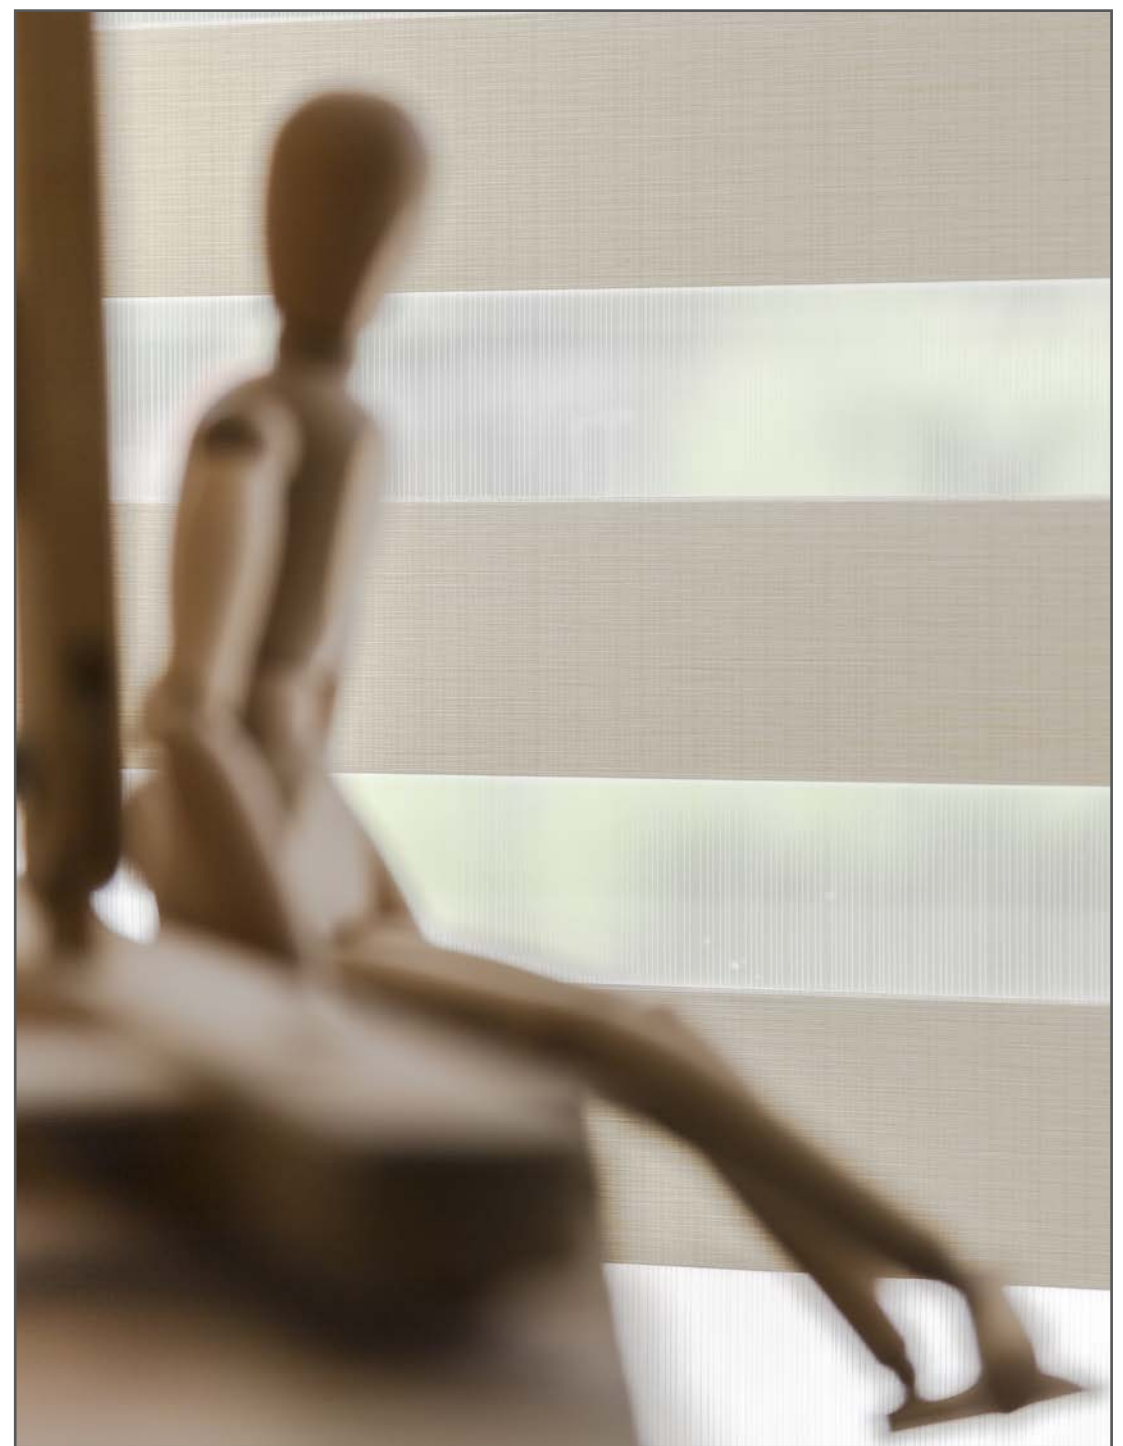



ARONA
CONCEPT

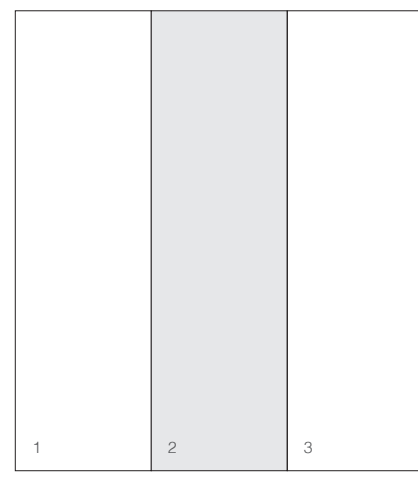


ARONA
CONCEPT

1,3
 2
 BAVAY 1
 CRISNATUR 1





ARONA
CONCEPT

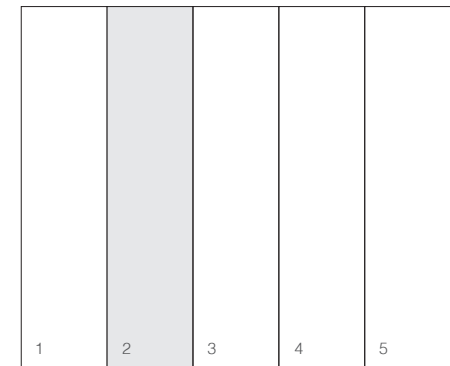

1,3,4,5 SECRET SPARK 1
2 CRISTAL METAL ELIO 1




ARONA
CONCEPT



ARONA
CONCEPT




ITE-ECO 178
MEDOC 2

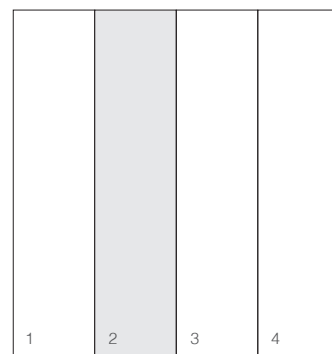



B RUBÍ (ITE ECO 177) 1,2,3,4

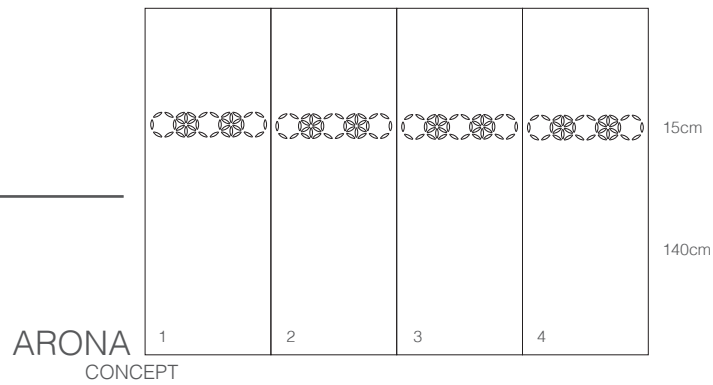




ARONA
CONCEPT



ARONA
CONCEPT






ARONA
CONCEPT

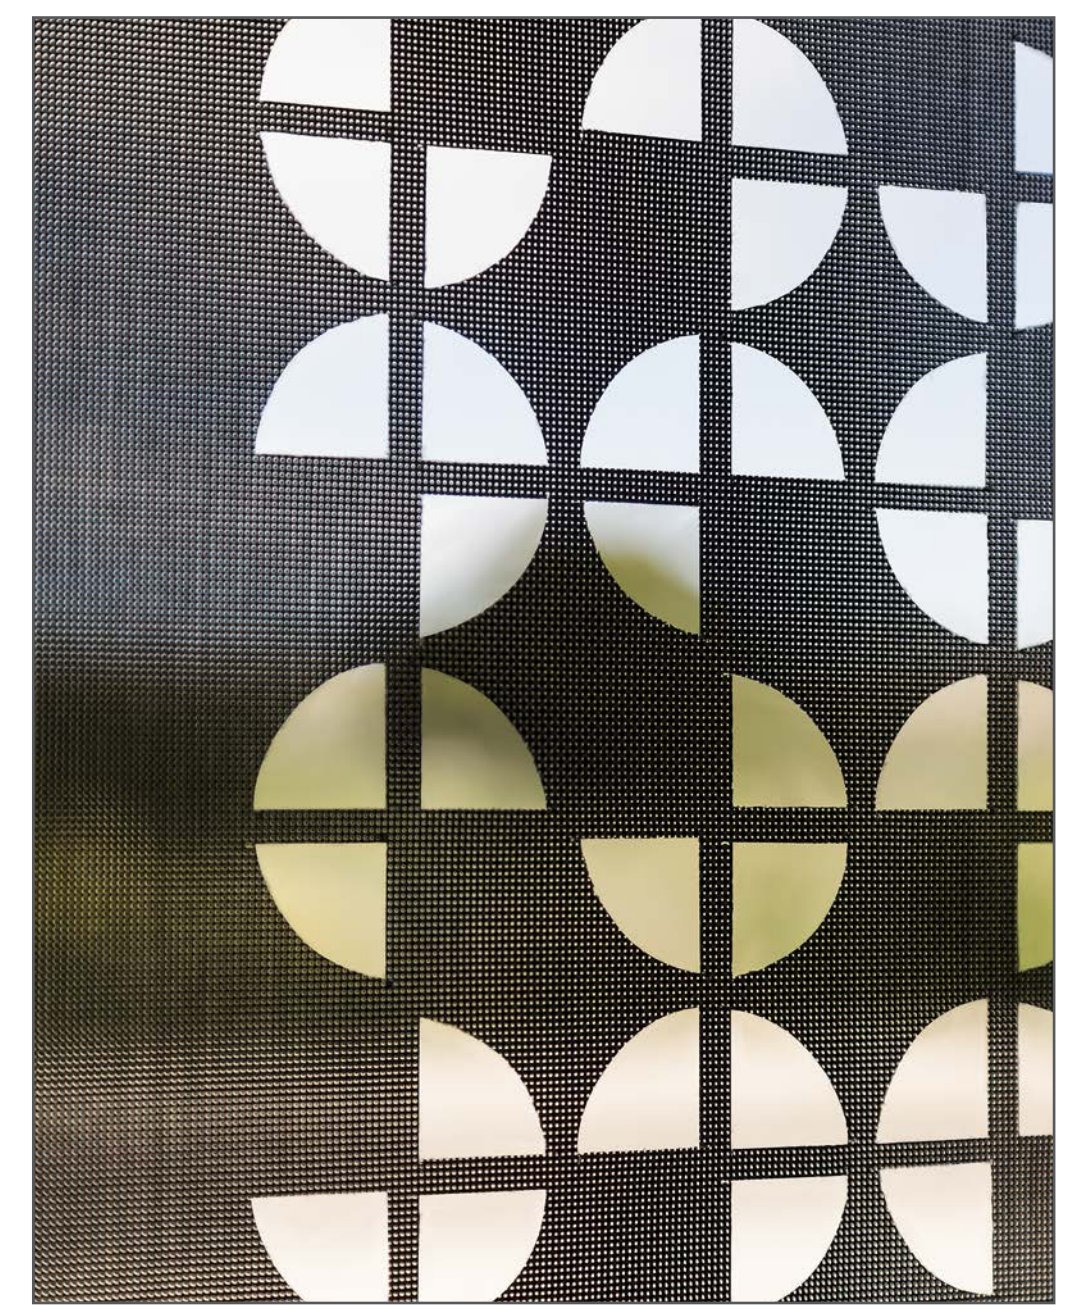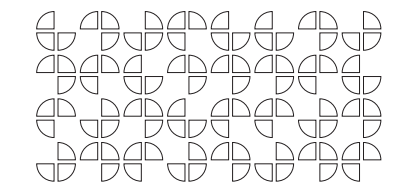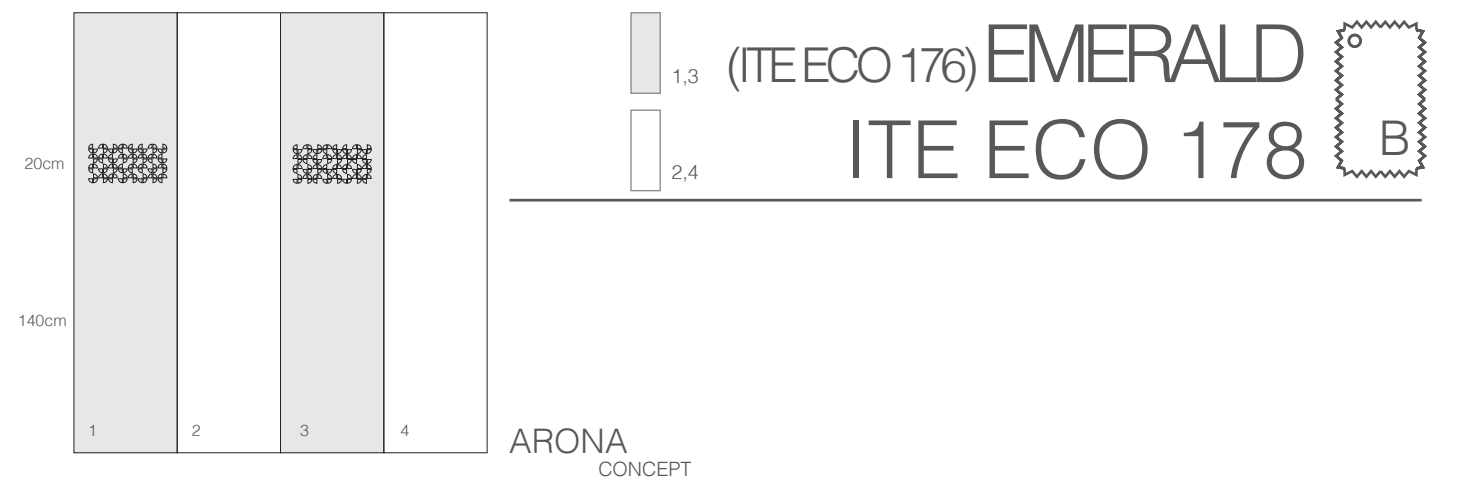




°
B


DIAMOND (ITE ECO 175)
TEXTUR ECO 1

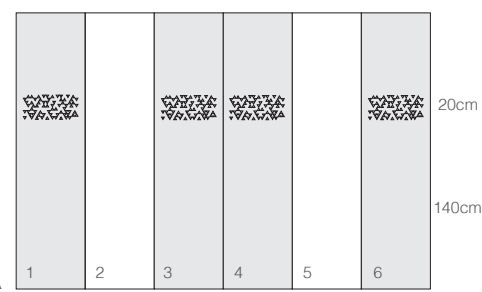



ARONA
CONCEPT

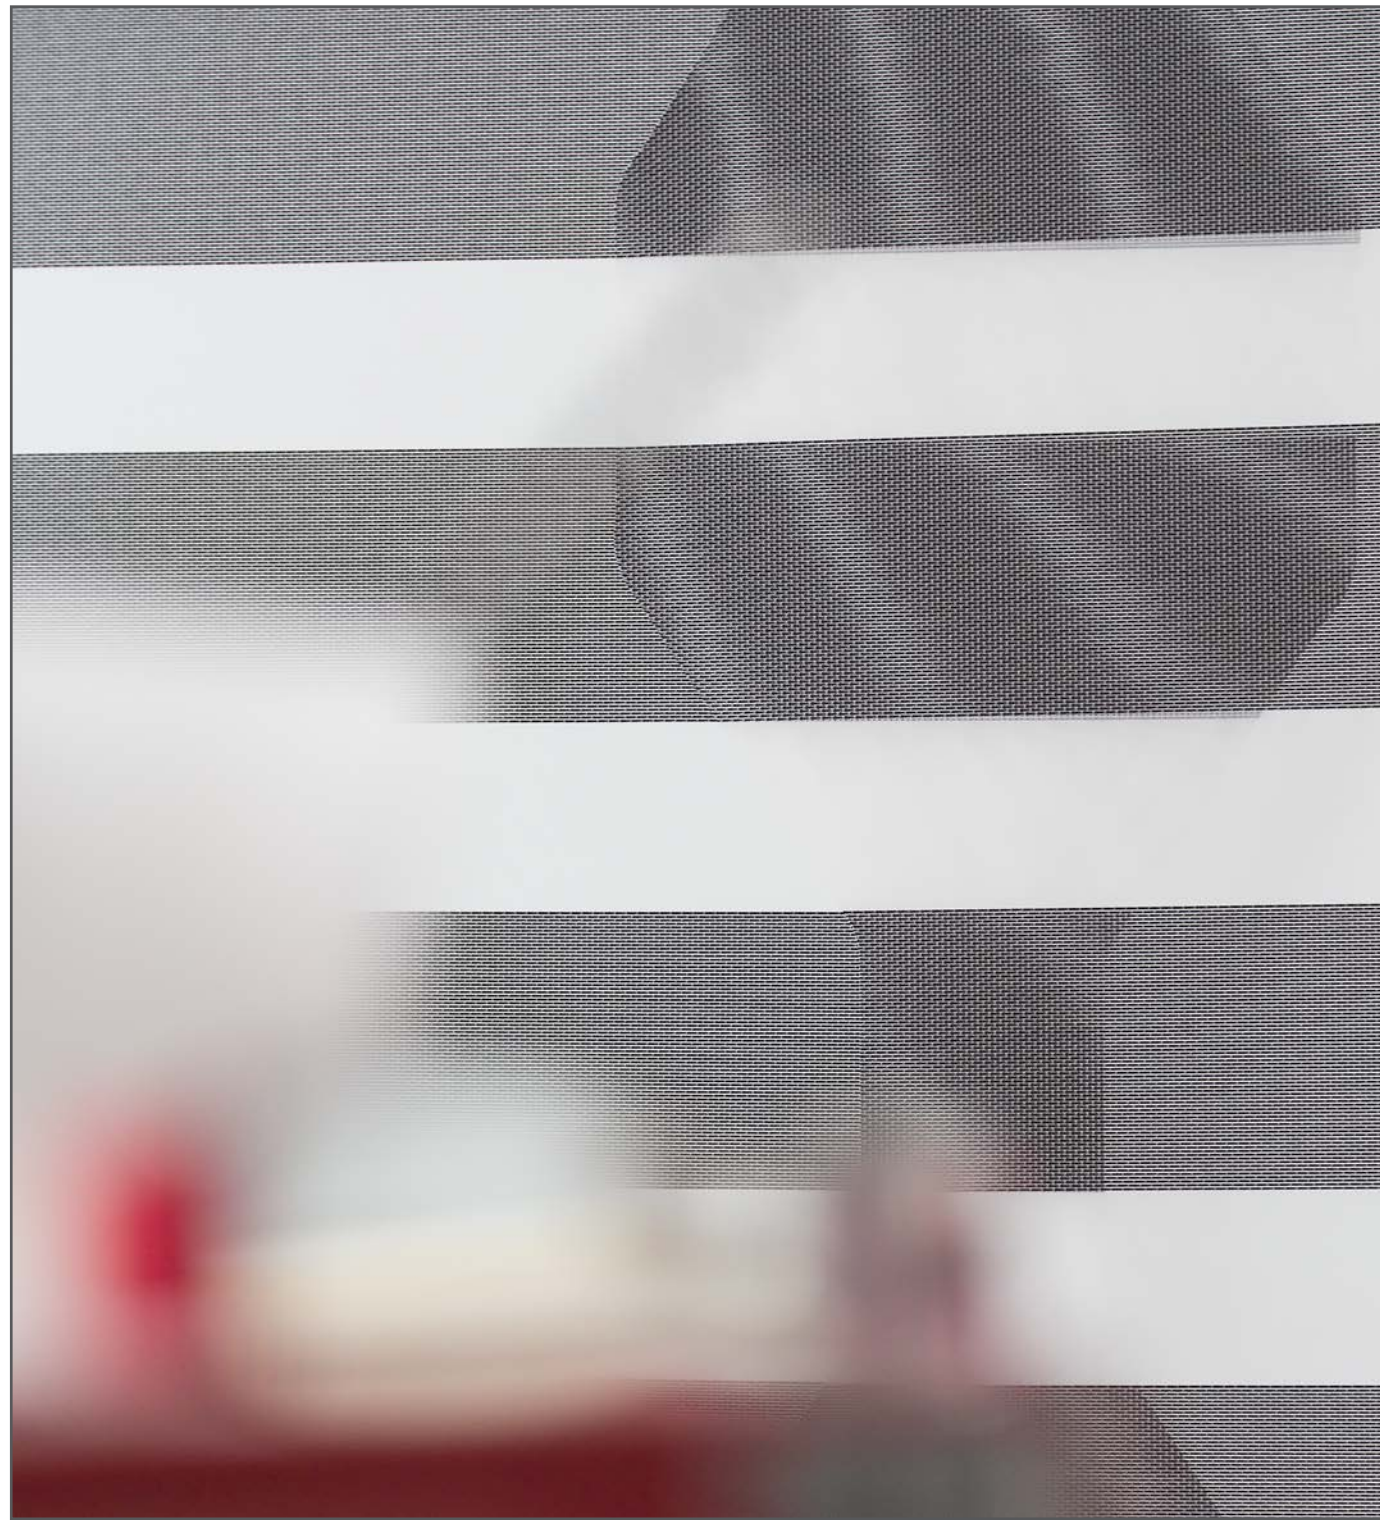


A GRAVITY 4



1,2,3

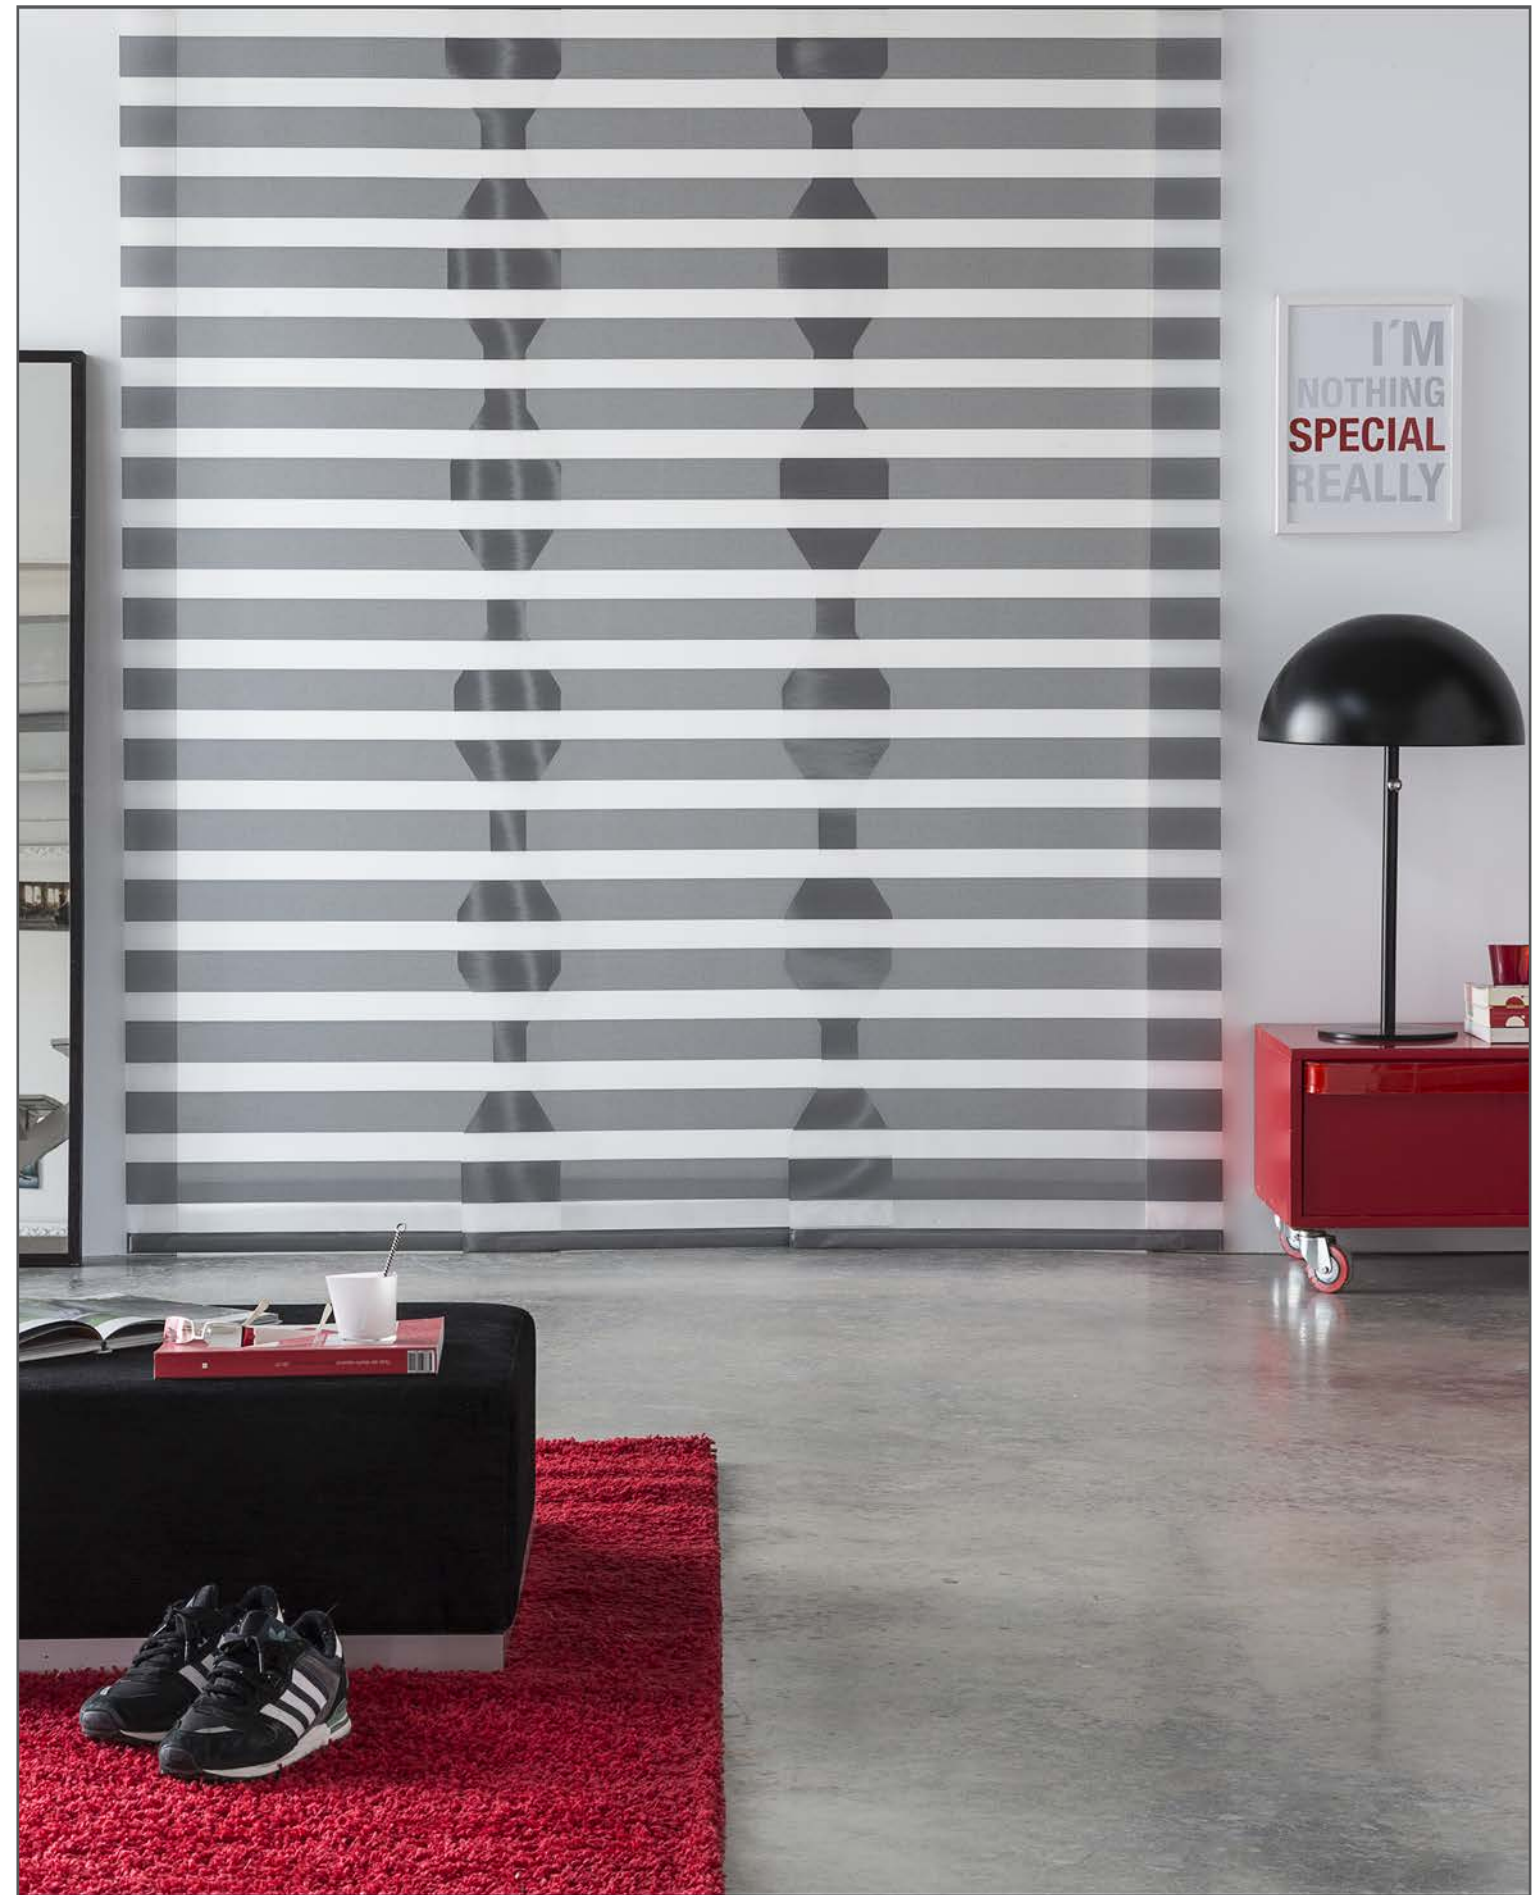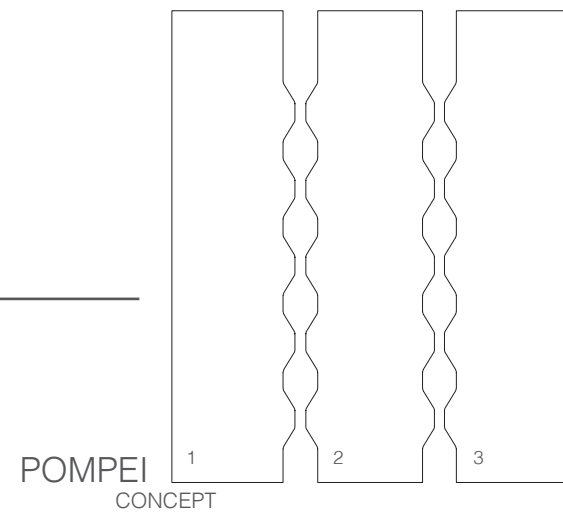

POMPEI
CONCEPT

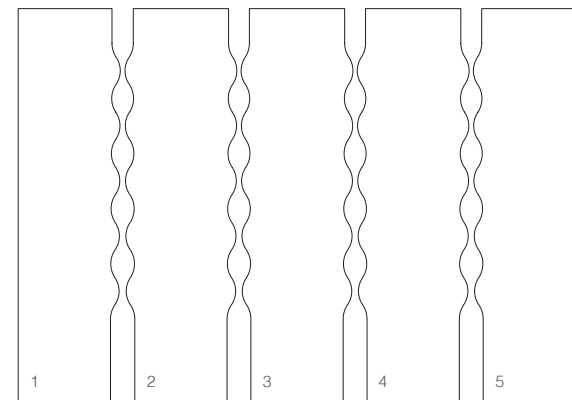

VIOLETTA
CONCEPT




MOSS 9



VIOLETTA
CONCEPT




EDEL 1
EDEL 17

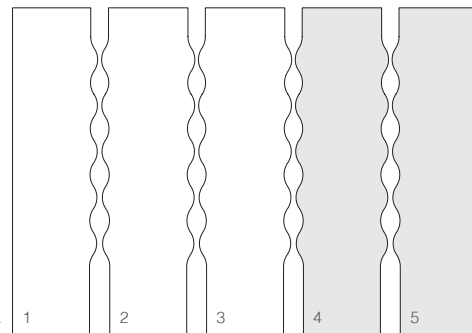

VIOLETTA
CONCEPT



MILANO
CONCEPT

VM008U

MILANO
CONCEPT


			25%
			50%
			25%
1	2	3	4

PARIS 1
LOOP 1
PARIS 1





TRIESTE
CONCEPT

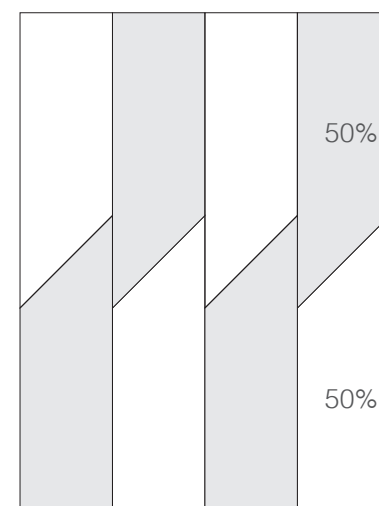


PLABER 4
 PLABER 3
 °
A

TRIESTE
CONCEPT



BARI
CONCEPT

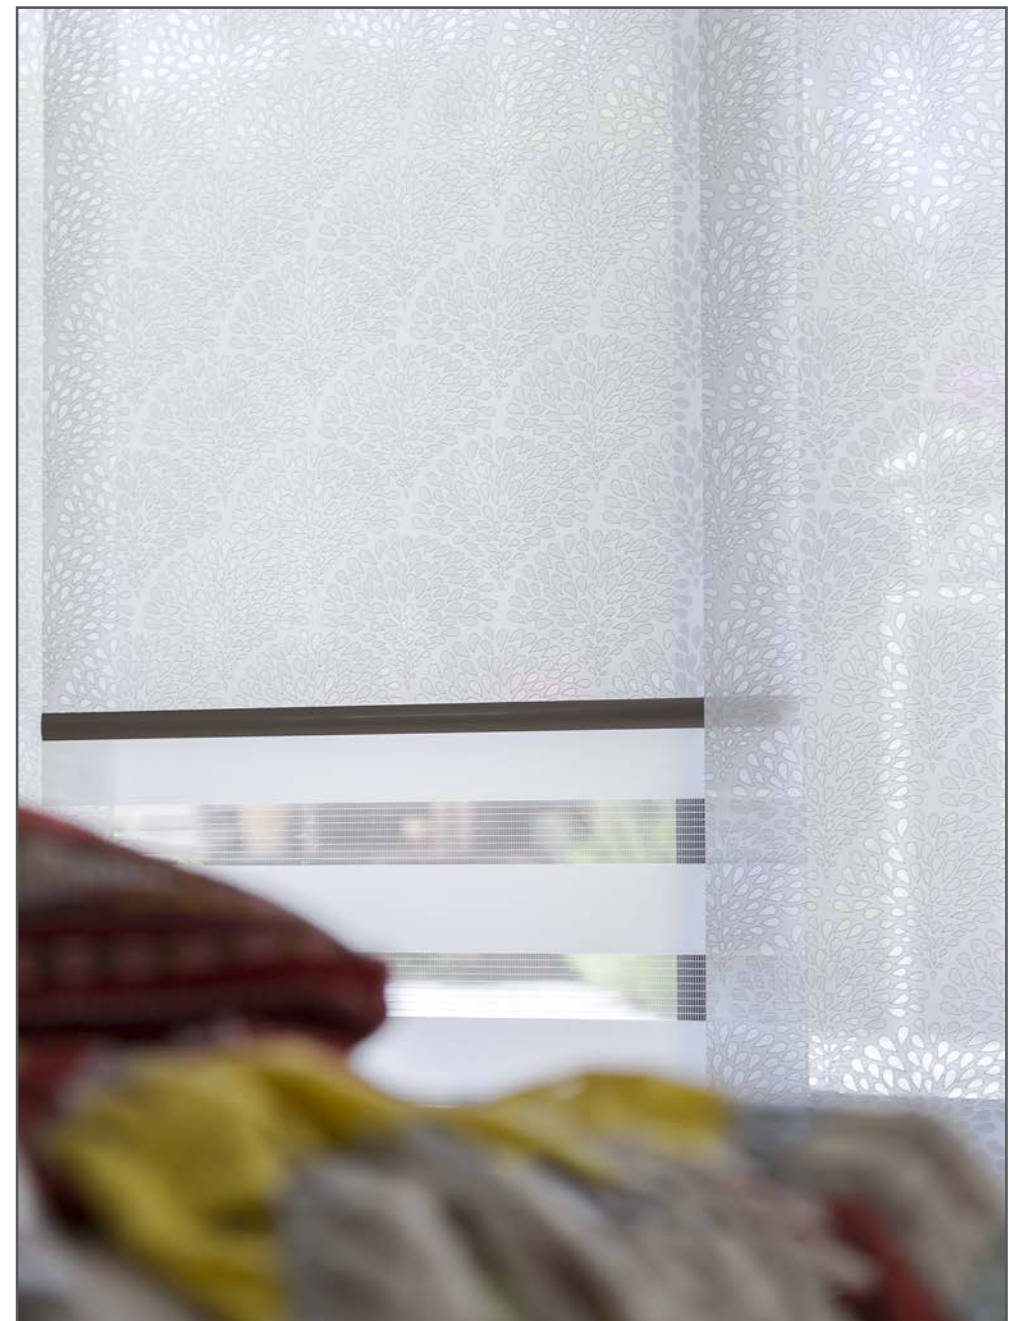

1	25% PREMIER 1	3
	50% DHARMA 1	
	25% PREMIER 1	

VM011U

1,3



DHARMA 1






BARI
CONCEPT

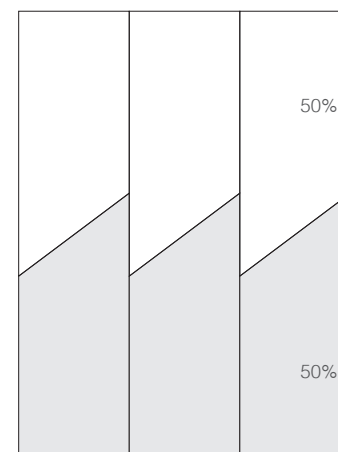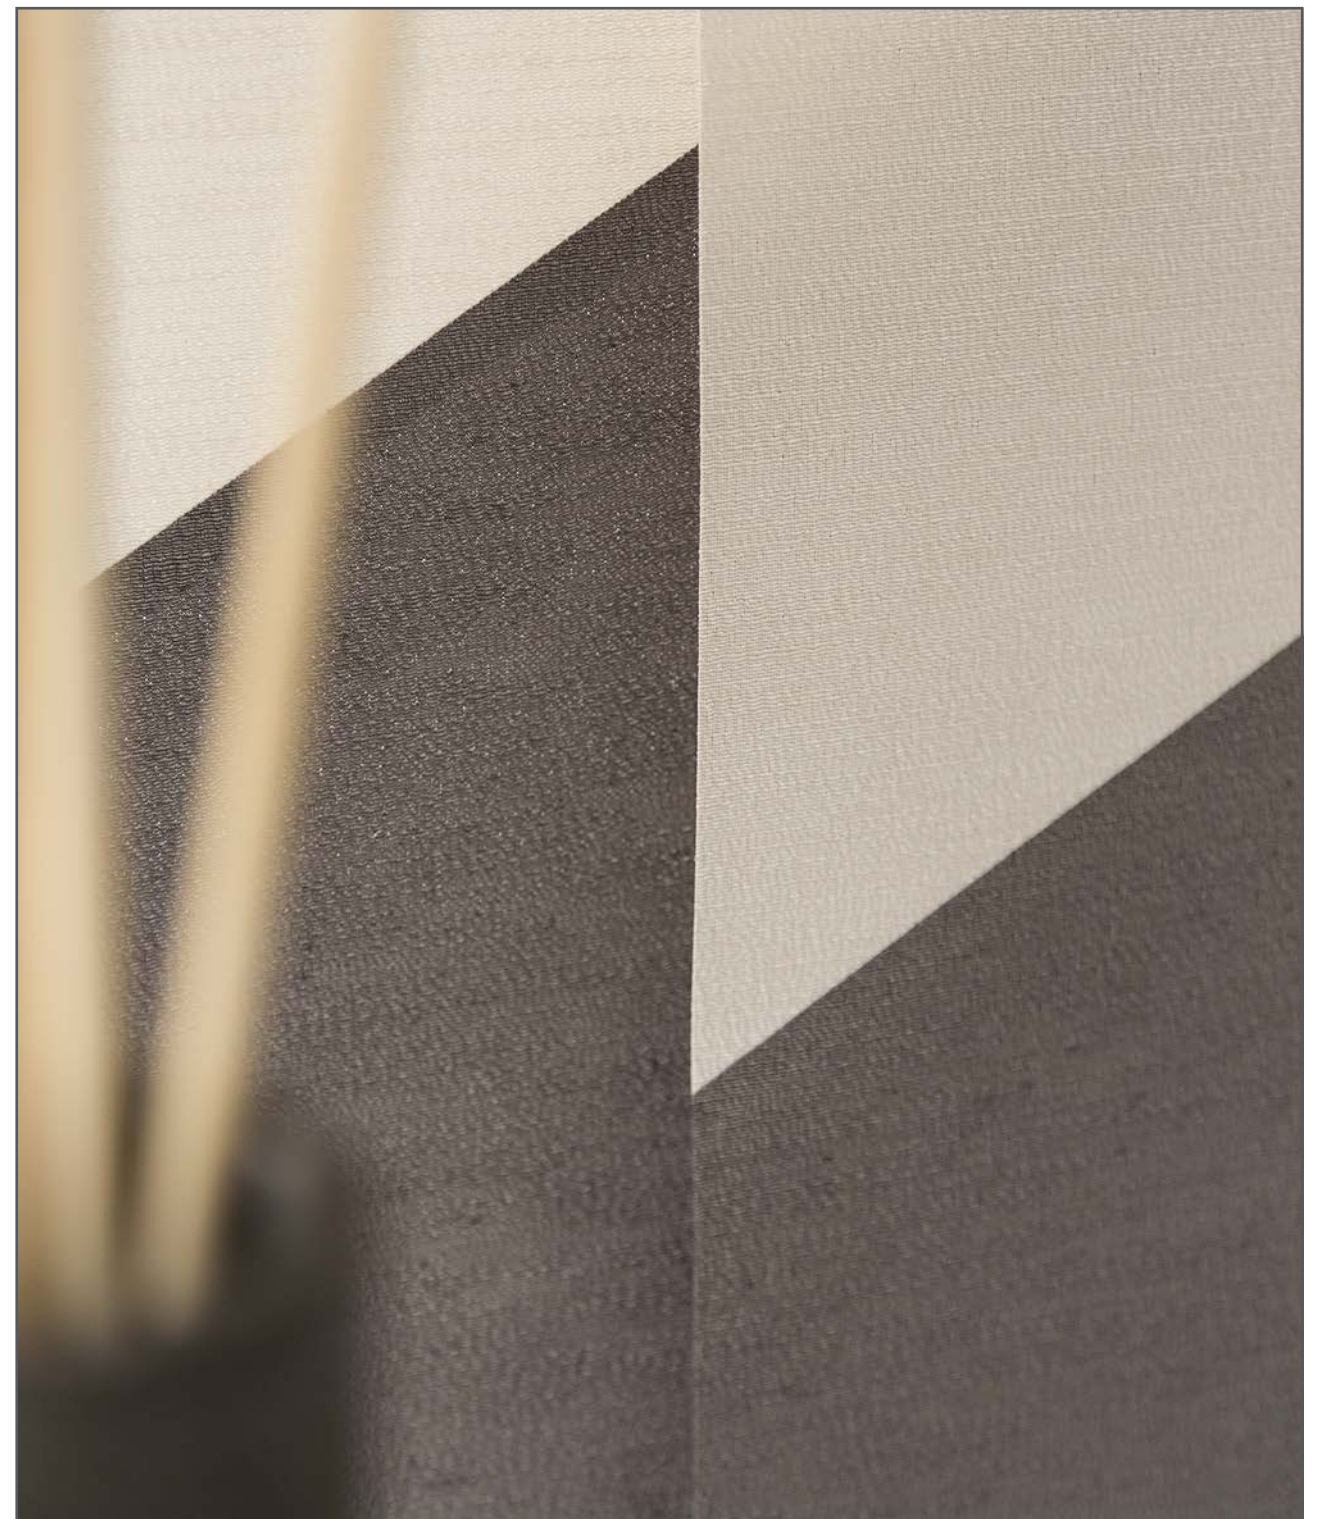

PARMA
CONCEPT



 MYSTERY 6031
 MYSTERY 6084
 

PARMA
CONCEPT



DANIO 2
 PATTI 1
 DANIO 2

40%			
20%			
40%			
1	2	3	4



VM010U


SIENA
 CONCEPT



SIENA
 CONCEPT





 LEO 1
 LEO 2

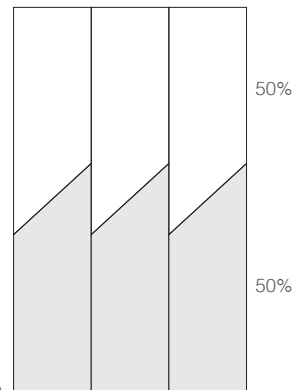


PARMA
CONCEPT



PARMA
CONCEPT

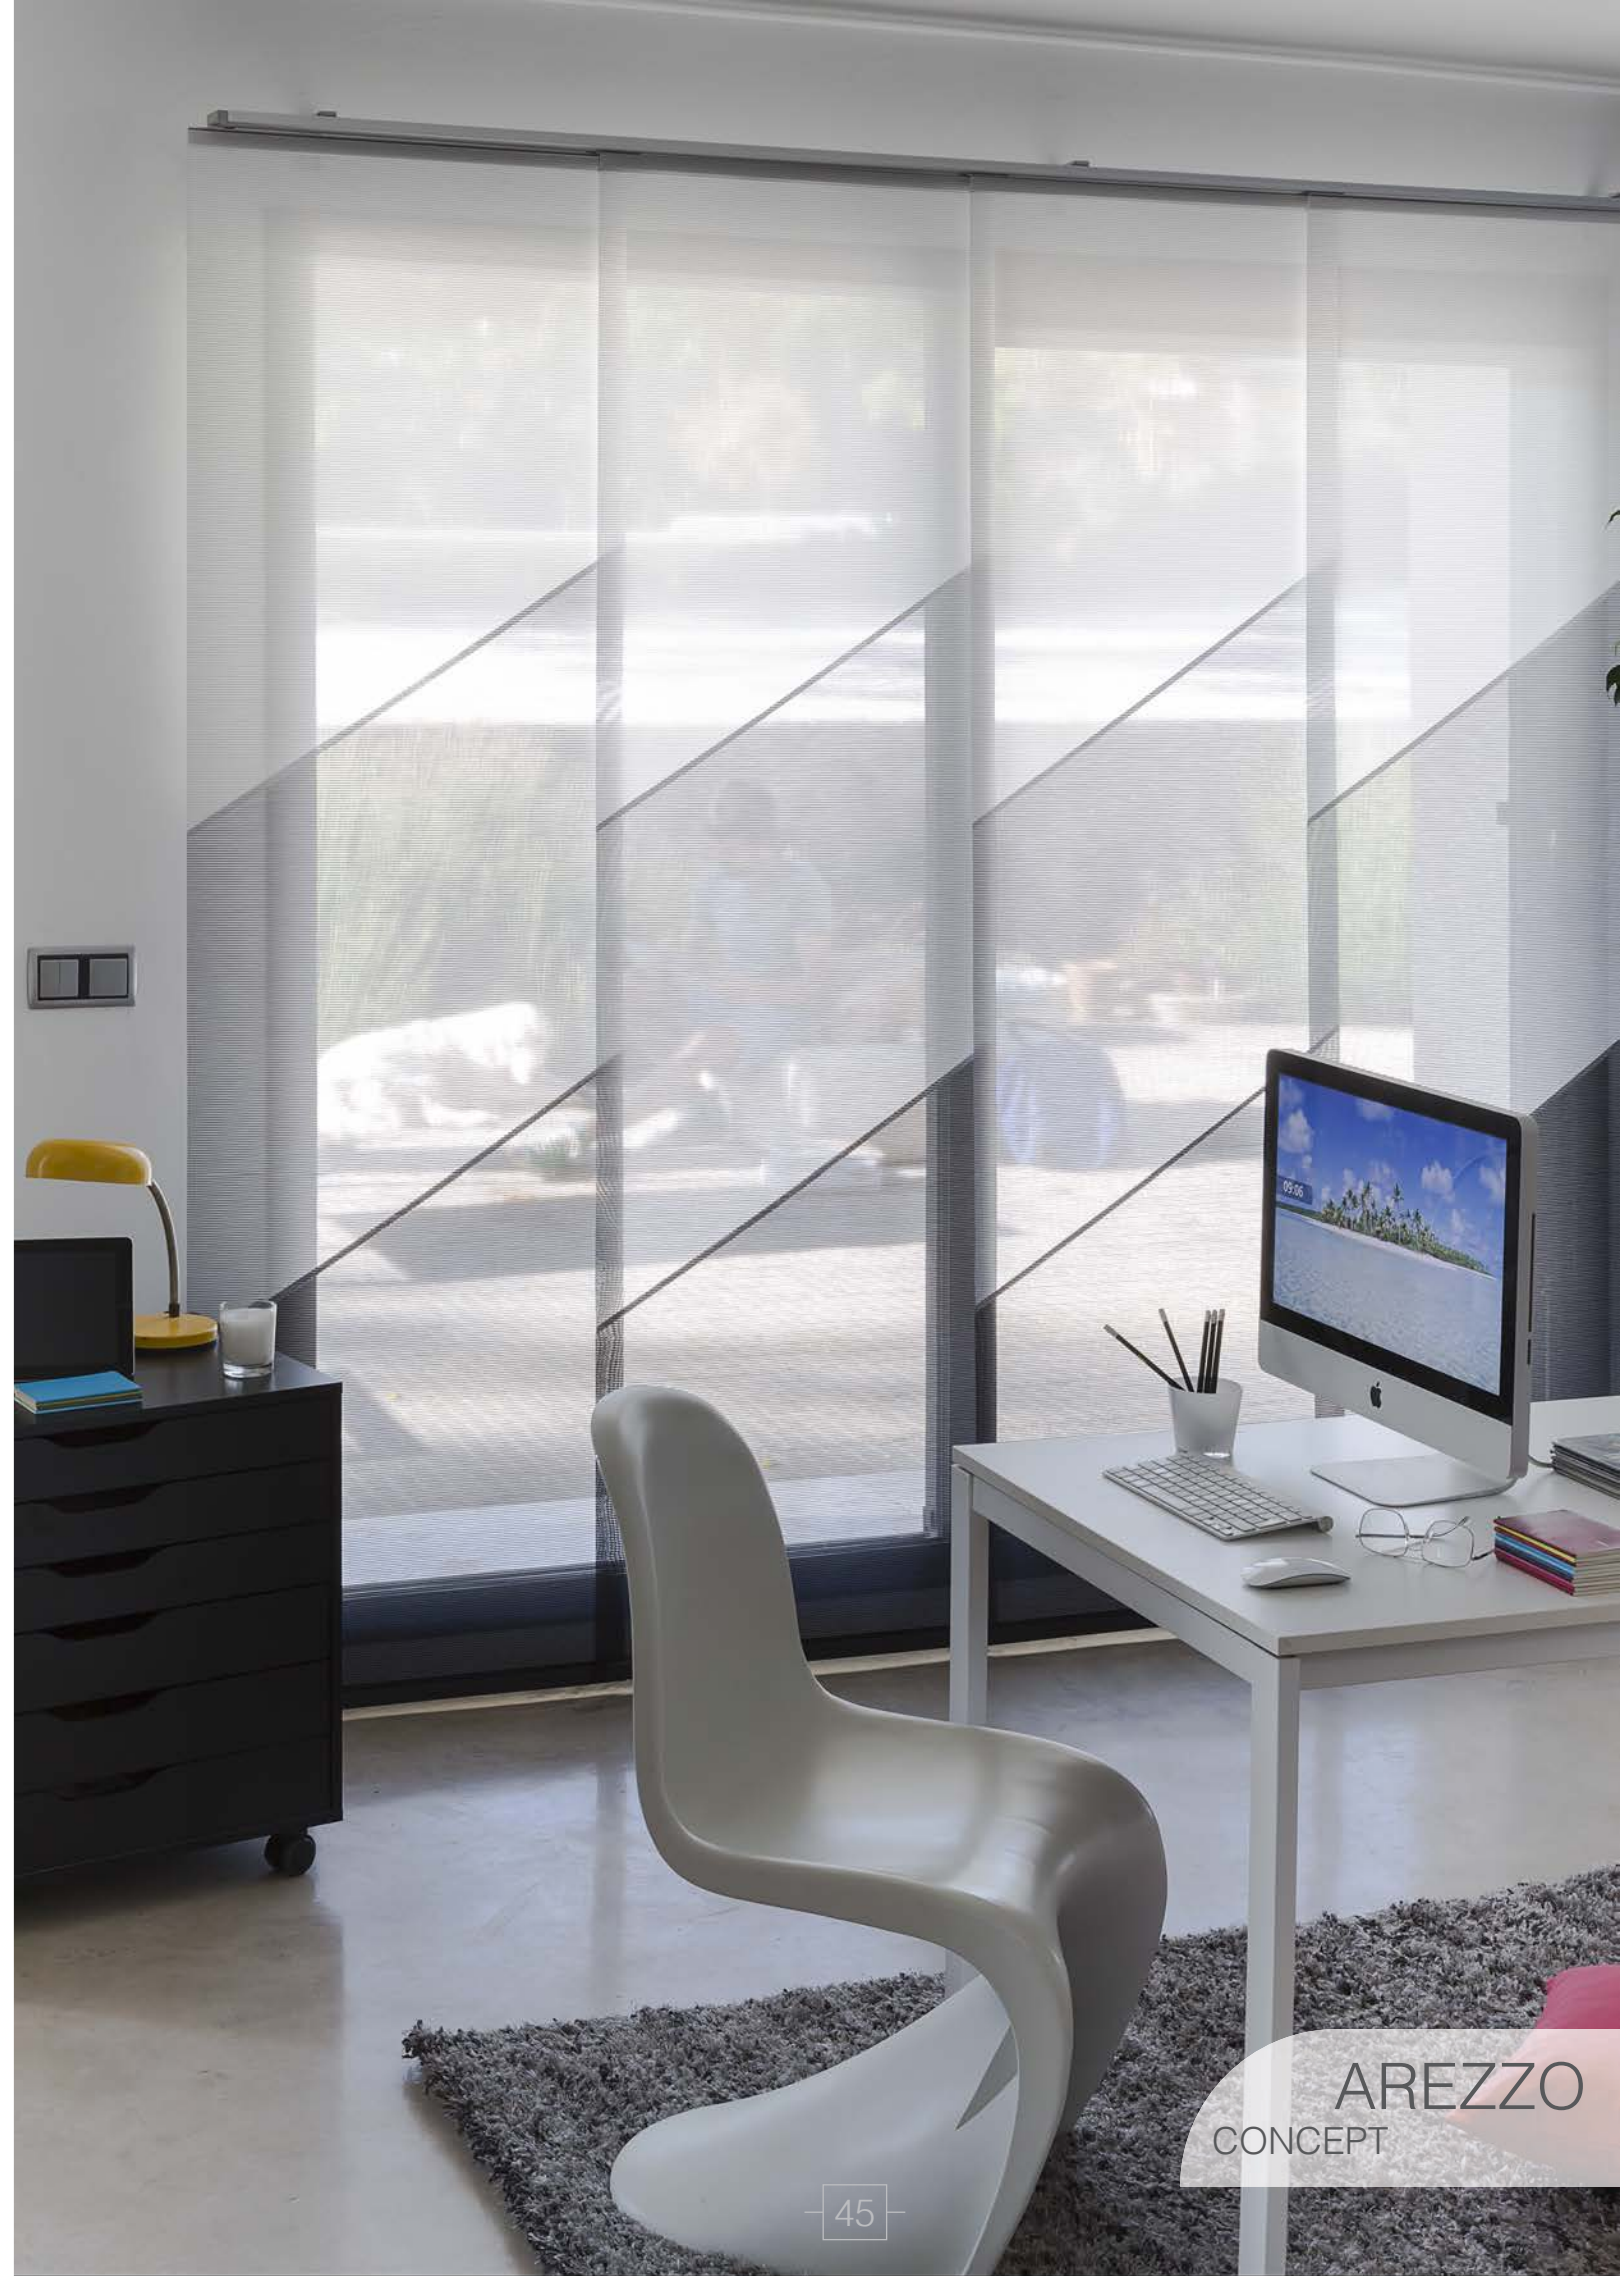

GRACE 1
GRACE 2
GRACE 3

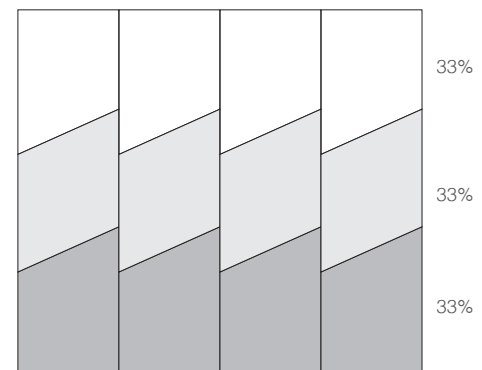

AREZZO
CONCEPT

AREZZO
CONCEPT



	ALLUSION	BAZILLE
Composición / Composition / Composition / Composizione	100% Pes	100% Pes
Transmitancia / Transmittance / Transmission / Trasmittanza	53,00%	53,00%
Peso / Weight / Poids / Peso	309 gr/m ²	309 gr/m ²
Espesor / Thickness / Épaisseur / Spessore	0,36 mm	0,36 mm
Resistencia a la tracción / Tensile strenght / Résistance à la traction / Resistenza alla trazione		
Resistencia a la luz / Light fastness / Résistance a la lumière / Resistente alla luce	>7 grade	>7 grade
Retardante al fuego / Fire resistant / Traitement ignifuge / Ignifugo		
Ancho / Width / Laize / Larghezza	285 cm	275 cm
Referencias / References / Références / Referenze	1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,24,25	1
Aplicaciones / Applications / Applications / Applicazione		
Mantenimiento / Maintenance / Maintient / Manutenzione		


	MAGNUM	PARIS	PARURE	PLABER
Composición / Composition / Composition / Composizione	100% Pes	60% Polyester 40% Vis	60% Polyester 40% Vis	100% Pes
Transmitancia / Transmittance / Transmission / Trasmittanza	53,00%			
Peso / Weight / Poids / Peso	309 gr/m ²	107 gr/m ²	107 gr/m ²	260 gr/m ²
Espesor / Thickness / Épaisseur / Spessore	0,36 mm			0,30 mm
Resistencia a la tracción / Tensile strenght / Résistance à la traction / Resistenza alla trazione		urd 30h/78dctex trama 29p- 1/40nm	urd 30h/78dctex trama 29p- 1/40nm	
Resistencia a la luz / Light fastness / Résistance a la lumière / Resistente alla luce	>7 grade	>5 grade	>5 grade	>4-5 grade
Retardante al fuego / Fire resistant / Traitement ignifuge / Ignifugo				
Ancho / Width / Laize / Larghezza	275 cm	275 cm	275 cm	200 cm
Referencias / References / Références / Referenze	1	1	1	1,2,3,4
Aplicaciones / Applications / Applications / Applicazione				
Mantenimiento / Maintenance / Maintient / Manutenzione				

	BLINTE	BAUDIN	CASSAT	CLUNY
Composición / Composition / Composition / Composizione	100% Pes	100% Pes	100% Pes	100% Pes
Transmitancia / Transmittance / Transmission / Trasmittanza		53,00%	53,00%	53,00%
Peso / Weight / Poids / Peso	190 gr/m ²	309 gr/m ²	309 gr/m ²	110 gr/m ²
Espesor / Thickness / Épaisseur / Spessore	0,35 mm	0,36 mm	0,36 mm	0,35 mm
Resistencia a la tracción / Tensile strenght / Résistance à la traction / Resistenza alla trazione				
Resistencia a la luz / Light fastness / Résistance a la lumière / Resistente alla luce	4-6 grade	>7 grade	>7 grade	>7 grade
Retardante al fuego / Fire resistant / Traitement ignifuge / Ignifugo				
Ancho / Width / Laize / Larghezza	127 cm	275 cm	275 cm	285 cm
Referencias / References / Références / Referenze	1,2,3,4	1	1	1,2,3,4,5,6,7,8,9,10,11,12
Aplicaciones / Applications / Applications / Applicazione				
Mantenimiento / Maintenance / Maintient / Manutenzione				

	PREMIER *	SEURAT	DHARMA	URBAN
Composición / Composition / Composition / Composizione	100% Pes	100% Pes	60% Polyester 40% Vis	100% Pes
Transmitancia / Transmittance / Transmission / Trasmittanza	7,00%	53,00%		
Peso / Weight / Poids / Peso	105 gr/m ²	309 gr/m ²	107 gr/m ²	141,5 gr/m ²
Espesor / Thickness / Épaisseur / Spessore	0,43 mm	0,36 mm		0,26 mm
Resistencia a la tracción / Tensile strenght / Résistance à la traction / Resistenza alla trazione	Warp urd-137 weft- trama 142		urd 30h/78dctex trama 29p- 1/40nm	
Resistencia a la luz / Light fastness / Résistance a la lumière / Resistente alla luce	>4 grade	>7 grade	>5 grade	
Retardante al fuego / Fire resistant / Traitement ignifuge / Ignifugo				
Ancho / Width / Laize / Larghezza	280 cm	275 cm	275 cm	275 cm
Referencias / References / Références / Referenze	1,43	1	1	1,2
Aplicaciones / Applications / Applications / Applicazione				
Mantenimiento / Maintenance / Maintient / Manutenzione				

	DHARMA	GRAVITY *	INDIAN	LOFT-LOOP
Composición / Composition / Composition / Composizione	60% Polyester 40% Vis	100% Pes	60% Polyester 40% Vis	60% Polyester 40% Vis
Transmitancia / Transmittance / Transmission / Trasmittanza				
Peso / Weight / Poids / Peso	107 gr/m ²	102,5 gr/m ²	107 gr/m ²	107 gr/m ²
Espesor / Thickness / Épaisseur / Spessore		0,32 mm		
Resistencia a la tracción / Tensile strenght / Résistance à la traction / Resistenza alla trazione	urd 30h/78dctex trama 29p- 1/40nm	Warp urd-32 -weft- trma 13	urd 30h/78dctex trama 29p- 1/40nm	urd 30h/78dctex trama 29p- 1/40nm
Resistencia a la luz / Light fastness / Résistance a la lumière / Resistente alla luce	>5 grade	>4 grade	>5 grade	>5 grade
Retardante al fuego / Fire resistant / Traitement ignifuge / Ignifugo				
Ancho / Width / Laize / Larghezza	275 cm	260 cm	275 cm	275 cm
Referencias / References / Références / Referenze	1	1,2,3,4	1	1,2,3,4,5,6,7,8,9,10,11,12
Aplicaciones / Applications / Applications / Applicazione				
Mantenimiento / Maintenance / Maintient / Manutenzione				

* Tejidos no válidos para
 Fabrics not valid to
 Tessus invalides pour
 Tessuti non validi per





BAVAY

	Composición / Composition / Composition / Composizione	42% Pes 58% Acryl.
	Transmitancia / Transmittance / Transmission / Trasmittanza	40,00%
	Peso / Weight / Poids / Peso	213,5 gr/m ²
	Espesor / Thickness / Épaisseur / Spessore	0,54 mm
	Resistencia a la tracción / Tensile strenght / Résistance à la traction / Resistenza alla trazione	
	Resistencia a la luz / Light fastness / Résistance a la lumière / Resistente alla luce	>7 grade
	Retardante al fuego / Fire resistant / Traitement ignifuge / Ignifugo	
	Ancho / Width / Laize / Larghezza	285 cm
	Factor de apertura / Openness factor / Facteur d'ouverture / Fattore di apertura	
	Referencias / References / Références / Referenze	1
	Aplicaciones / Applications / Applications / Applicazione	
	Mantenimiento / Maintenance / Maintient / Manutenzione	

MISTERY

MOSS

NATURE ECO*

PULA

	Composición / Composition / Composition / Composizione	100% Pes	100% Pes	22% Pes - 78% Pvc	100% Pes
	Transmitancia / Transmittance / Transmission / Trasmittanza	9,00%		0,31%	28,00%
	Peso / Weight / Poids / Peso	262 gr/m ²	80 gr/m ²	416 gr/m ²	151 gr/m ²
	Espesor / Thickness / Épaisseur / Spessore	0,66 mm	0,32 mm	0,024 mm	0,39 mm
	Resistencia a la tracción / Tensile strenght / Résistance à la traction / Resistenza alla trazione				
	Resistencia a la luz / Light fastness / Résistance a la lumière / Resistente alla luce	>5 grade	>4 grade	>4 grade	
	Retardante al fuego / Fire resistant / Traitement ignifuge / Ignifugo				
	Ancho / Width / Laize / Larghezza	280 cm	280 cm	250 cm	260 cm
	Factor de apertura / Openness factor / Facteur d'ouverture / Fattore di apertura			1%	
	Referencias / References / Références / Referenze	6011,6031,6043,6084	1,3,9	201A,230A,166A,240A,211A,201B,230B,166B,240B,211B	1,2,3,4
	Aplicaciones / Applications / Applications / Applicazione				
	Mantenimiento / Maintenance / Maintient / Manutenzione				

CINZIA*

CRISNATUR*

ITE-ECO*

METAL ECO

	Composición / Composition / Composition / Composizione	100% Pes	100% Pes	15% Pes - 85% Pvc	21% Pes 79% Polyvinyl Chloride
	Transmitancia / Transmittance / Transmission / Trasmittanza		12,20%	7,85%	5,00%
	Peso / Weight / Poids / Peso	170,8 gr/m ²	174 gr/m ²	420 gr/m ²	590 gr/m ²
	Espesor / Thickness / Épaisseur / Spessore	0,48 mm	0,48 mm	0,58 mm	0,85 mm
	Resistencia a la tracción / Tensile strenght / Résistance à la traction / Resistenza alla trazione				
	Resistencia a la luz / Light fastness / Résistance a la lumière / Resistente alla luce		3 grade	>5 grade	>7 grade
	Retardante al fuego / Fire resistant / Traitement ignifuge / Ignifugo				
	Ancho / Width / Laize / Larghezza	280 cm	280 cm	250-300 cm	250 cm
	Factor de apertura / Openness factor / Facteur d'ouverture / Fattore di apertura			5%	5%
	Referencias / References / Références / Referenze	1,2,3	1,2,4	000,168,169,272,273,278,271,274,277,178,175,176,177	1,2,3,4
	Aplicaciones / Applications / Applications / Applicazione				
	Mantenimiento / Maintenance / Maintient / Manutenzione				

SUN DECO*

TEXTUR ECO

VALENTI

VENICE

	Composición / Composition / Composition / Composizione	10% Pes 80% Vinil - 10%Fiber glass	15% Pes 85% Polyvinyl Chloride	100% Pes	100% Pes
	Transmitancia / Transmittance / Transmission / Trasmittanza	6,65%	5,00%		
	Peso / Weight / Poids / Peso	435 gr/m ²	430 gr/m ²	162 gr/m ²	146,1 gr/m ²
	Espesor / Thickness / Épaisseur / Spessore	0,73 mm	0,56 mm	0,46 mm	0,46 mm
	Resistencia a la tracción / Tensile strenght / Résistance à la traction / Resistenza alla trazione				
	Resistencia a la luz / Light fastness / Résistance a la lumière / Resistente alla luce	>4_5 grade	>7 grade		
	Retardante al fuego / Fire resistant / Traitement ignifuge / Ignifugo				
	Ancho / Width / Laize / Larghezza	250 cm	250 cm	280 cm	280 cm
	Factor de apertura / Openness factor / Facteur d'ouverture / Fattore di apertura	3%	5%		
	Referencias / References / Références / Referenze	01,06,04,21	1,2,3	1,2,3	1
	Aplicaciones / Applications / Applications / Applicazione				
	Mantenimiento / Maintenance / Maintient / Manutenzione				



- Iones negativos, ayudan a refrescar y purificar el aire.
- Negative ions that help freshen and purify the air.
- Ions négatifs, qui aident a rafraichir et purifier l'air.
- Ioni negativi, aiutano a rinfrescare e purificare l'aria.



- Acabado anti bacteriano en el tejido.
- Antibacterial finish on fabric.
- Finissage anti bactéries sur le tissu.
- Finitura antibatterica nel materiale tessile.




- Anti ácaros, reducen las alergias causadas por los Ácaros domésticos.
- Anti-mite, to reduce allergies caused by domestic mites.
- Anti-acariens, réduisent les allergies causées par les acariens domestiques.
- Anti acari, riducono le allergie causate dagli acari domestici.



- Anti moho.
- Anti-mould.
- Anti moisissure.
- Anti muffa.

- * Tejidos no válidos para
Fabrics not valid to
Tessus invalides pour
Tessuti non validi per



- Ayuda a eliminar los olores molestos.
- It helps remove unpleasant odors.
- Aide à éliminer les odeurs indésirables.
- Si intende eliminare gli odori fastidiosi.



- Bloqueo de ondas electromagnéticas (ayuda a reducir la electricidad estática) lo cual reduce dolores de cabeza, cansancio, problemas para dormir, etc.
- Blocking of electromagnetic waves (it helps reduce static electricity) which reduces headaches, fatigue, sleep problems, etc.
- Blocage des ondes électromagnétiques (aide à réduire l'électricité statique). Ceci aide a réduire les maux de tête, fatigue, problèmes pour dormir, etc.
- Blocco di onde elettromagnetiche (aiuta a ridurre l'elctricità statica), riducendo mal di testa, stanchezza, problemi di sonno, ecc.



- Bloqueo de rayos UV. Previene daños producidos por los rayos UV.
- UV blockage. It prevents damage caused by UV rays.
- Blocage des rayons UV. Préviert les maux causés par les rayons UV.
- Blocco dei raggi UV. Previene danni causati dai raggi UV.



- Retardante al fuego.
- Fire-retardant.
- Traitement ignifuge.
- Ritardante di fiamma.



CRISMETAL ELIO*

DANIO

EDEL

	Composición / Composition / Composition / Composizione	100% Pes	100% Pes	100% Pes
	Transmitancia / Transmittance / Transmission / Trasmittanza	42,60%	9,00%	37,00%
	Peso / Weight / Poids / Peso	95 gr/m ²	172 gr/m ²	85 gr/m ²
	Espesor / Thickness / Épaisseur / Spessore	0,30 mm	0,40 mm	0,42 mm
	Resistencia a la tracción / Tensile strenght / Résistance à la traction / Resistenza alla trazione			
	Resistencia a la luz / Light fastness / Résistance a la lumière / Resistente alla luce	4 grade	>5 grade	>7 grade
	Retardante al fuego / Fire resistant / Traitement ignifuge / Ignifugo			
	Ancho / Width / Laize / Larghezza	275 cm	280 cm	280 cm
	Referencias / References / Références / Referenze	1,2	1,2,3	1,7,8,9,12,13,14,16,17
	Aplicaciones / Applications / Applications / Applicazione			
	Mantenimiento / Maintenance / Maintient / Manutenzione			

NISE

PATTI*

SECRET SPARK

	Composición / Composition / Composition / Composizione	100% Pes	100% Pes	94% Pes - 6% Metalized fiber
	Transmitancia / Transmittance / Transmission / Trasmittanza	9,00%		27,90%
	Peso / Weight / Poids / Peso	186 gr/m ²	120,5 gr/m ²	112 gr/m ²
	Espesor / Thickness / Épaisseur / Spessore	0,33 mm	0,42 mm	0,23 mm
	Resistencia a la tracción / Tensile strenght / Résistance à la traction / Resistenza alla trazione			
	Resistencia a la luz / Light fastness / Résistance a la lumière / Resistente alla luce	>5 grade		>4 grade
	Retardante al fuego / Fire resistant / Traitement ignifuge / Ignifugo			
	Ancho / Width / Laize / Larghezza	280 cm	280 cm	280 cm
	Referencias / References / Références / Referenze	2,3,4	1,2	1,2
	Aplicaciones / Applications / Applications / Applicazione			
	Mantenimiento / Maintenance / Maintient / Manutenzione			


EDEL NAT

FIUME

GRACE

	Composición / Composition / Composition / Composizione	100% Pes	100% Pes	100% Pes
	Transmitancia / Transmittance / Transmission / Trasmittanza	40,00%	9,00%	37,00%
	Peso / Weight / Poids / Peso	113 gr/m ²	170,8 gr/m ²	118 gr/m ²
	Espesor / Thickness / Épaisseur / Spessore	0,6 mm	0,50 mm	0,48 mm
	Resistencia a la tracción / Tensile strenght / Résistance à la traction / Resistenza alla trazione			
	Resistencia a la luz / Light fastness / Résistance a la lumière / Resistente alla luce	>7-8 grade	>5 grade	>5 grade
	Retardante al fuego / Fire resistant / Traitement ignifuge / Ignifugo			
	Ancho / Width / Laize / Larghezza	280 cm	280 cm	280 cm
	Referencias / References / Références / Referenze	1,2,3	1,3	1,2,3,4,5,6,7,8,9
	Aplicaciones / Applications / Applications / Applicazione			
	Mantenimiento / Maintenance / Maintient / Manutenzione			

* Tejidos no válidos para
Fabrics not valid to
Tessus invalides pour
Tessuti non validi per



HOLI*

IRIDE*


LEO

	Composición / Composition / Composition / Composizione	100% Pes	100% Pes	100% Pes
	Transmitancia / Transmittance / Transmission / Trasmittanza			9,00%
	Peso / Weight / Poids / Peso	109,6 gr/m ²	133 gr/m ²	156 gr/m ²
	Espesor / Thickness / Épaisseur / Spessore	0,34 mm	0,52 mm	0,46 mm
	Resistencia a la tracción / Tensile strenght / Résistance à la traction / Resistenza alla trazione			
	Resistencia a la luz / Light fastness / Résistance a la lumière / Resistente alla luce			>5 grade
	Retardante al fuego / Fire resistant / Traitement ignifuge / Ignifugo			
	Ancho / Width / Laize / Larghezza	280 cm	280 cm	280 cm
	Referencias / References / Références / Referenze	1	1,2	1,2,3
	Aplicaciones / Applications / Applications / Applicazione			
	Mantenimiento / Maintenance / Maintient / Manutenzione			



	OXIDE*	CASSIS*	MEDOC*	TERRE*
Composición / Composition / Composition / Composizione	58% Pvc - 24% Acryl. / 10% Pes - 8%Pa	58% Pvc - 24% Acryl. / 10% Pes - 8%Pa	58% Pvc - 24% Acryl. / 10% Pes - 8%Pa	58% Pvc - 24% Acryl. / 10% Pes - 8%Pa
Transmitancia / Transmittance / Transmission / Trasmittanza	0,1%	0,1%	0,1%	0,1%
Peso / Weight / Poids / Peso	615 gr/m ²	615 gr/m ²	615 gr/m ²	615 gr/m ²
Espesor / Thickness / Épaisseur / Spessore	1 mm	1 mm	1 mm	1 mm
Resistencia a la tracción / Tensile strenght / Résistance à la traction / Resistenza alla trazione				
Resistencia a la luz / Light fastness / Résistance a la lumière / Resistente alla luce				
Retardante al fuego / Fire resistant / Traitement ignifuge / Ignifugo				
Ancho / Width / Laize / Larghezza	145 cm	145 cm	145 cm	145 cm
Factor de apertura / Openness factor / Facteur d'ouverture / Fattore di apertura	1%	1%	1%	1%
Referencias / References / Références / Referenze	1,2	1,2	1,2	1,2
Aplicaciones / Applications / Applications / Applicazione				
Mantenimiento / Maintenance / Maintient / Manutenzione				

* Tejidos no válidos para
 Fabrics not valid to
 Tissus invalides pour
 Tessuti non validi per



BOHEME

by **destiny**